

# Deutscher Y560

## 560mm SELF PROPELLED GRASS CUTTER

MODEL 36012 Fixed Front Wheels ENGINE MODEL Briggs & Stratton Intec.60 12802.0174.E1  
MODEL 36212 Swivel Front Wheels ENGINE MODEL Briggs & Stratton Intec.60 12802.0174.E1  
MODEL 36217 Swivel Front Wheels ENGINE MODEL Honda GXV160k1-N4



## MAINTENANCE INSTRUCTIONS AND PARTS LIST

EDITION No. 2

PART No.Y901

# SAFETY INSTRUCTIONS

- Never mow while barefoot or wearing open sandals! or thongs. Wear long trousers and heavy shoes (preferably safety footwear).
- Know your controls. Read this booklet carefully. Learn how to stop engine quickly in any emergency.
- Make sure the lawn is clear of sticks, stones, bones, wire and debris. They could be thrown by the blades.
- Stop the engine and disconnect spark plug wire before checking or working on the mower.
- Before using, always visually inspect to see that blades, blade pins and cutter assembly are not worn or damaged. Replace worn or damaged blades and pins in sets to preserve balance.  
**DAMAGED BLADES AND WORN PINS ARE MAJOR HAZARDS.**
- Check all nuts, bolts and screws often; always be sure the mower is in safe operating condition. Use only replacement parts made and guaranteed by DEUTSCHER.
- Add fuel BEFORE starting engine. Avoid spilling petrol and do not fill the tank while engine is running or while you are smoking.
- Do not mow whilst people, especially children, or pets are in the mowing area.
- Never use the mower unless the grass catcher, or guards provided by the manufacturer, are in position.
- Disengage all blade and drive clutches before starting.
- Start the engine carefully with feet well away from the blades.
- Do not operate engine in a confined space where exhaust fumes (carbon monoxide) can collect.
- Stop the engine whenever you leave the mower, even for a moment.
- Disengage cuttershaft drive before moving mower across gravel drives, walks or roads.
- Do not allow children or people unfamiliar with these instructions to use the mower.
- On slopes or wet grass, be extra careful of your footing.
- Never cut grass by pulling the mower towards you.
- Be extremely careful when using a mower on slopes.
- Do not over-speed the engine or alter governor settings. Excessive speed is dangerous and shortens mower and engine life.
- It is advisable to wear suitable eye protection when operating a mower.
- Turn the fuel off at the conclusion of mowing and reduce the throttle setting during engine run-out.
- Store fuel in a cool place in a container specifically designed for the purpose. In general, plastic containers are unsuitable.
- Never pick up or carry a mower when it is operating

NOTE: These safety instructions are recommended by the Standards Association of Australia for use with pedestrian and ride-on mowers.

**Deutscher** Y560

## PRE START CHECK

Your DEUTSCHER Grass Cutter comes to you tested and ready to operate with engine and gear box already filled with oil.

Before operating the machine, thoroughly check the area to be cut and remove any object that may cause damage to the machine.

1. Use fresh fuel - do not use 2 stroke fuel.
2. Read Engine Instruction Book.
3. Ensure that gear lever is in neutral position.
4. Set blades to maximum cutting height.
5. Pull belt release lever towards handles to disengage cutter belt.
6. Set throttle lever to midway position.
7. Start engine according to instructions and allow time for warm up before engaging belt release lever, which locks in working position.

Do not operate engine at maximum revs unless heavy conditions warrant it.



ILLUSTRATION 1

### Important

**OIL:** Your engine needs GOOD OIL - CLEAN OIL - ENOUGH OIL. Each five (5) hours add oil to top level filler opening.

**AIR CLEANER:** Service air cleaner every 25 running hours under normal conditions. Under dusty conditions, every 4 hours. (Refer to Engine Instruction Manual).

**PETROL:** Use fresh fuel.

**COOLING FINS, SCREEN:** This engine is air cooled. Keep the blower screen, fins on flywheel, cylinder head and block, free from grass or dirt and grease. Check every 8 hours. Clogged fins and screen block air-flow, causing over-heating, which may result in serious damage to the engine. Remove blower screen and clean regularly.

# OPERATING INSTRUCTIONS AND MAINTENANCE GUIDE

**BELT ADJUSTMENT** Maintain belts at correct tension. Too much or too little wastes power.  
**GEAR BOX BELT** Loosen rear nut and tighten front nut (see illustration 1). **MAKE SURE BELT IS ENTIRELY FREE WHEN CLUTCH LEVER IS DISENGAGED. DO NOT OVER-TIGHTEN BELT.**  
**CUTTER BELT** Swing back top cover. Pull belt release lever towards handles to disengage belt. Loosen rear nut and tighten front nut. Adjust cutter spindle brake by adjusting nuts on brake rod (Y26) until brake operates when belt lever is disengaged.

**BLADES** Before checking blades  
 1. Set throttle control on stop.  
 2. Disconnect spark plug wire.  
 Keep blades sharp. Rotate cutter till blade appears at side chute. Unscrew special brass nut, remove spring washer and blade assembly can be taken out from underneath. Make sure bolt is not worn (replace if necessary). Oil threads and replace by reverse procedure. Screw brass nut until level with thread of the bolt and ensure the offset of the brass nut is facing out.  
 Both edges of blades can be used by turning blade over.

## DIAGRAM OF BLADE ASSEMBLY

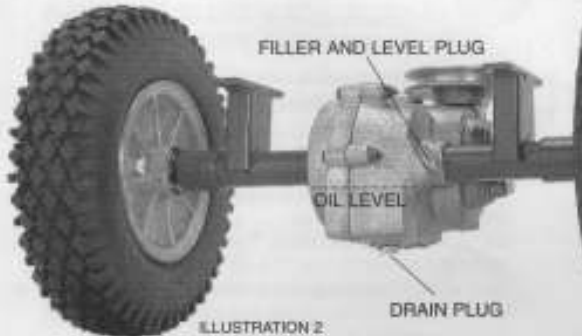



ILLUSTRATION 2

## LUBRICATION

**ENGINE** According to Engine Instruction Manual.  
**GEAR BOX** Use Castrol E.P.X. 85W/140 gear oil. Check oil level every 2 weeks. Drain & re-fill every 100 hrs. Fill to plug level (see illustration 2).  
**FRONT WHEELS** Grease every 8 hours.  
**GEAR CONTROL LEVER & LINKAGE** Oil all joints daily.  
**HEIGHT CONTROL LEVER & LINKAGE** Oil all joints daily.  
**CLUTCH LEVER & LINKAGE** Oil all joints daily.  
**CUTTER SPINDLE** Put height adjustment lever in low position. Swing back main cover guard. Nipple on spindle housing is then accessible. Grease every 50 hours till grease comes out the overflow hole.

### LUBRICATION INTERVAL CHART



	Daily	50hrs	100hrs
GEAR BOX			
Check		X	
Change			X
CUTTER SPINDLE		X	
FRONT WHEELS	X		
GEAR CONTROL LINKAGE	X		
HEIGHT CONTROL LINKAGE	X		
CLUTCH CONTROL LINKAGE	X		



ILLUSTRATION 3

# MAIN FRAME

# HANDLE & CONTROL ASSEMBLY

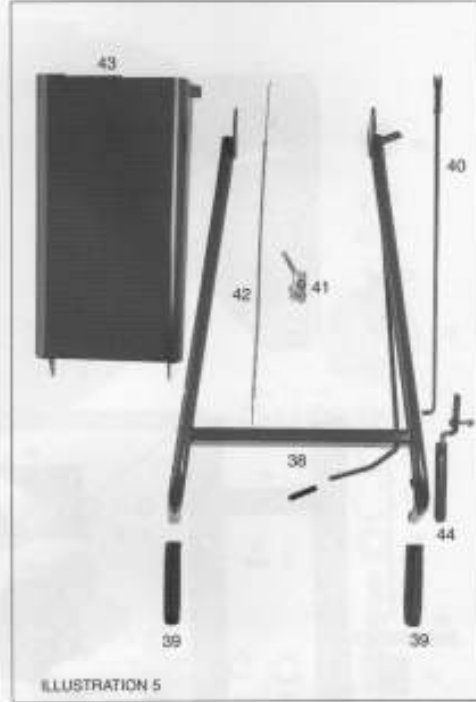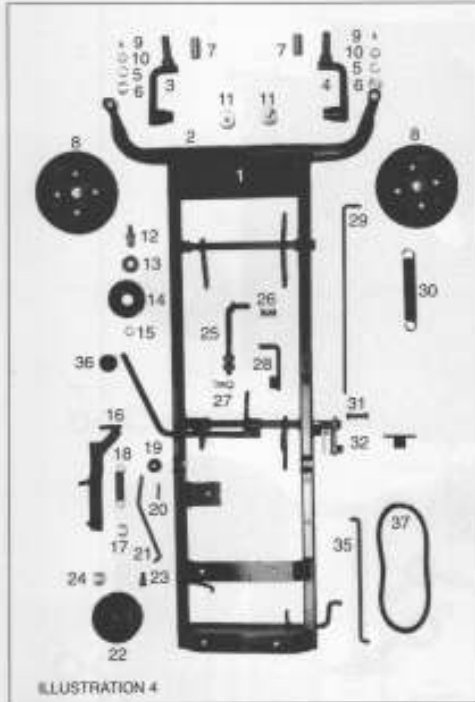

ILLUST. NO.	DESCRIPTION	PART NO.
1	Main frame (swivel wheels)	Y550
-	Main frame (fixed front wheels)	Y551
2	Front axle beam (swivel front wheels)	Y552
3	King pin & stub axle (left hand)	Y553
4	King pin & stub axle (right hand)	Y554
5	Washer	Y504
6	Thrust washer	Y505
7	Bush x 2	Y559
8	Wheel Complete	Y555
-	Wheel bearing x 2	T588
-	Tyre	Y557
-	Rim assembly	Y556
9	Grease nipple	R13
10	Circlip 16mm	RD136
11	Bolt & washer	T558
12	Clutch pulley pin	H59
13	Clutch pulley bearing (6203-2RS)	H60
14	Clutch pulley	H61
15	Circlip 15mm	H62
16	Clutch pulley arm	Y02
17	Washer 1/2"	T529
18	Clutch spring	Y03
19	Roller	H07
20	Pin	H08
21	Horizontal clutch rod	Y04
22	Engine pulley	Y05

ILLUST. NO.	DESCRIPTION	PART NO.
23	Bolt	DD110
24	Washer	DD111
25	Push rod	Y06
26	Push rod spring	D134
27	Bolt	Y07
28	Push rod connector	H26
29	Raise & lower con rod	Y08
30	Spring	D50
31	Bolt	Y532
32	Wing nut	G37
35	Horizontal gear rod	Y12
37	Gearbox v-belt (A23)	Y40
38	Handles	Y533
39	Handle grip	D19
40	Vertical clutch rod	Y534
41	Throttle control lever	Z08
42	Throttle control cable	H41
43	Top cover	Y17
44	Clutch lever	Y535
45	Vinyl sleeve	Y536
-	Decal set	Y900

# CUTTER HEAD

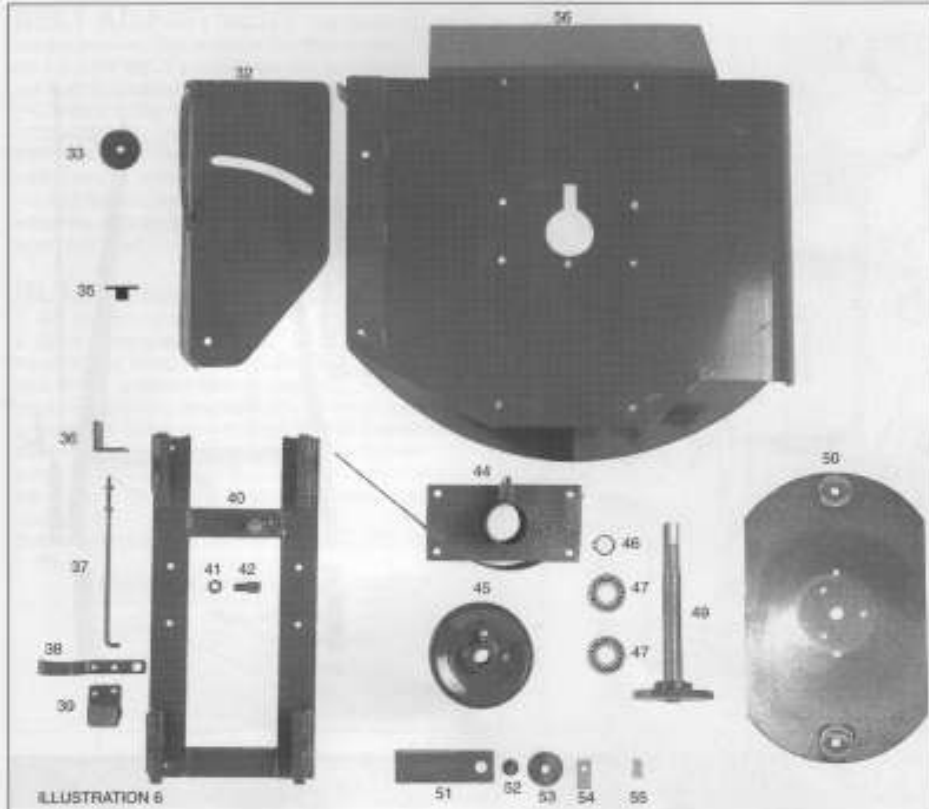


ILLUSTRATION 6

ILLUST. NO.	DESCRIPTION	PART NO.	ILLUST. NO.	DESCRIPTION	PART NO.
32	Side chute	Y21	45	Main spindle pulley	Y542
33	Washer	Y22	46	Circle 25mm	R29
35	Wing nut	G37	47	Spindle bearings	R28
36	Brake rod anchor	Y25	49	Main spindle & flange	Y31
37	Brake rod	Y26	50	Rotor	Y32
38	Brake arm	Y27	51	Blade	R01
39	Brake shoe	Y543	52	Blade bolt	D02
40	Raise & lower frame	Y29	53	Blade washer	D04
41	Nut 1/4" UNF	H03	54	Blade nut	D03
42	Pin	Y537	55	Rotor bolt x 3	G36
44	Main spindle bearing housing	Y30	56	Main guard	Y20
			-	Cutter drive belt (B50) Not illustrated	Y538

# GEAR BOX & DIFFERENTIAL

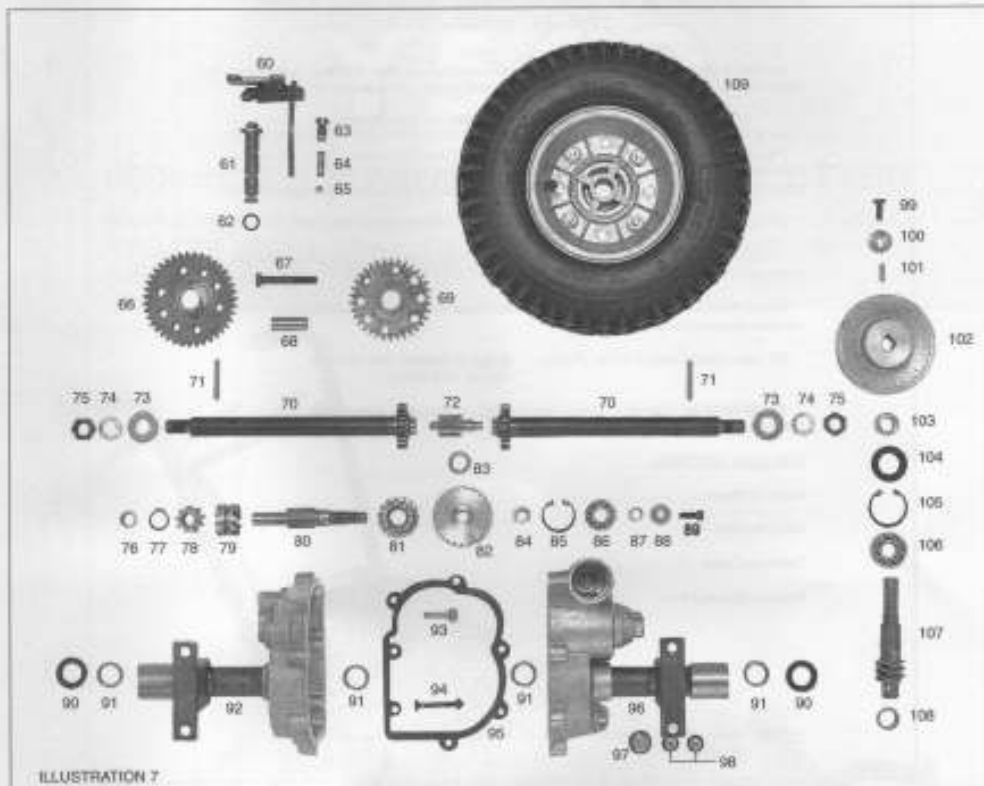


ILLUSTRATION 7

NO.	DESCRIPTION	NO.	NO.	DESCRIPTION	NO.	NO.	DESCRIPTION	NO.
60	Gear selector	YD70	78	Low gear pinion	HD87	96	R.H. Housing	YD103
61	Forward tappet & end	HD80	79	Double clutch	HD88	97	1/4" UNF plug & washer	HD104
62	O ring	RD133	80	Forward spindle	YD88	98	1/4" BSF plug & washer	MDD98
63	Spring holder	HD84	81	High gear pinion & clutch	HD90	99	Pulley screw	HD105
64	Spring	HD83	82	Bronze worm gear	YD91	100	Collar washer	HD106
65	Ball	HD82	83	Hardened worm gear washer	HD114	101	Key	HD107
66	Low crown gear	HD76	84	Lock nut	YD92	102	Pulley	HD108
67	Diff bolt 2 1/2" x 1/2" UNF x 4	HD75	85	Circlip 35mm	HD93	103	Spacer washer	HD109
68	Spacer sleeve x 4	MRD179	86	Ball bearing 6202	Z35	104	Oil seal 25 x 40 x 7mm	HD110
69	High crown gear	HD77	87	Bearing sleeve	HD115	105	Circlip 40mm	HD111
70	Axis (LH & RH are identical)	YD71	88	Washer	HD94	106	Ball bearing 6203	HD112
71	Axis pin	HD79	89	Screw	HD95	107	Input spindle & worm	YD113
72	Diff spider gear x 4	RD178	90	Oil seal 7/8" X 1 1/8" X 1/4"	DD90	108	Bearing	RD194
73	Axis washer	RD175	91	Axis roller bearing B148	Z50	109	Rear wheel C/W tyre & tube	Z80
74	Axis spring washer	HD124	92	L.H. Housing	YD98	*	Gear Box complete	YD120
75	Axis nut 1/2" UNF	RD174	93	Oil seal 1 1/4" X 1 1/2" WHIT	HD74	*	Tyre only	MDD116
76	Roller bearing B88	HD85	94	Bolt 2" x 1/2" UNF x 6	YD72	*	Tube only	RD204
77	Circlip 5/16"	HD86	95	Gasket	HD71	*	Wheel only	Z81

## **DEUTSCHER MOWER WARRANTY POLICY**

### **LIMITED WARRANTY**

Deutscher Mowers P/L will warrant the repair or replacement, free of charge, any parts of the mower, that are defective in materials or workmanship or both, for a period of:

**12 months from the date of purchase.**

This does not cover normal wear, abuse or incorrect service procedure of the mower (according to owners manual), the warranty repair must be carried out by an **Approved Deutscher Dealer**, with only **Genuine Deutscher Parts** used as **replacements**.

Deutscher have the right to inspect and retain Warranted Parts at its discretion.

Transportation of mower to and from dealer, and freight charges of parts are not covered by this warranty.

This warranty does not cover the engine fitted to your mower as it is covered by a separate manufacturers warranty.

For your nearest engine dealer, Phone— Briggs & Stratton 1800 650 042  
Honda 1800 809 327

All claims to be referred to Rover Mowers Ltd., as warranty Agents for the manufacturer.

#### **FOR YOUR RECORDS:**

Model of Mower: .....

Serial Number: .....

Date purchased: ...../...../.....

Mower purchased from: .....

.....

.....

.....

**Note:** The Model, serial number and purchase date are required before any claims can be considered.

### **NATIONAL CUSTOMER SERVICE**

## **ROVER MOWERS LIMITED**

CURTIN AVENUE WEST  
EAGLE FARM, QLD 4009

**PHONE (07) 3213 0233**  
**FREE FAX 1800 806 659**

MANUFACTURED IN AUSTRALIA BY  
**DEUTSCHER MOWERS PTY. LTD.**  
ABN 49 006 576 830  
**711 CRESWICK ROAD, BALLARAT, 3350**

Printed by Baxter & Stubbs Pty Ltd.  
Phone: (03) 5333 3379